

The **START 300** maintains batteries even deeply discharged battery.

CHARGER FUNCTION

The START 300 charges 12V and 24V lead acid batteries from **38 Ah to 300 Ah**.

It is a traditional charger. Charging must be monitored.

STARTER FUNCTION

The START 300 can start vehicles with 12V or 24V lead acid batteries from **35 Ah to 100 Ah**.

A pre-charge may be necessary to supply enough energy to start the vehicle.




High Power traditional starter and charger cable of instantaneous start even with deeply discharged battery.

- The Start 300 is protected against short circuits, polarity inversion and mains overvoltage.
- Handles for easy transportation
- Cables Ø 10 mm², (length: red & black - 2m)
- Externally visible and easily accessible fuse
- Large ammeter



EASY TO USE CONTROL PANEL

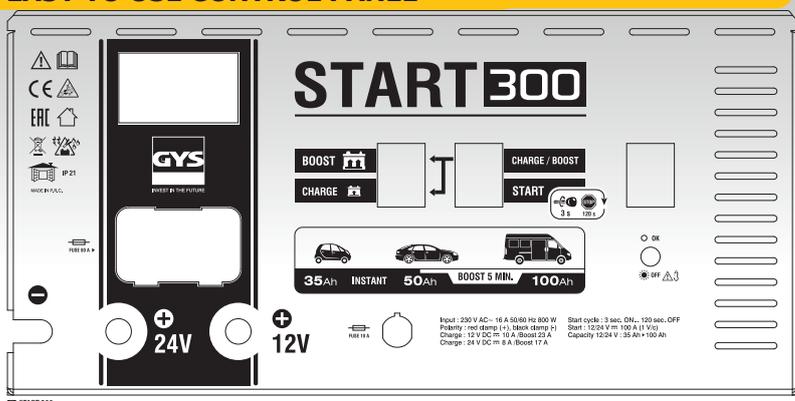

CE - EN 60335-2-29

50/60hz	I ₁	800W	12-24V	MIN. Ah	MAX. Ah	Reg	EFFICACE / RMS	MOYEN / AVERAGE EN 60335	BOOST	POS. MANUAL	START		Fuse	IP	cm	kg
											A 1V/C	A 0V/C				
230V	3.5A	800W	12-24V	38	>300	4	25A	10A (12V) 8A (24V)	23A (12V) 17A (24V)	•	100A	168A	80A	IP 21	40x33x23	13,8