

**Gysflash 30.24 is a high power stabilised supply (30A-12V & 15A-24V) incorporating Inverter technology with 5 functions :**

- **Battery support:** sustains 6, 12 and 24V (liquid or gel) automotive battery during diagnostic work
- **Advance battery charger:** ensures an ideal charging cycle for battery maintenance for the most modern vehicle
- **Showroom mode:** maintains batteries in showroom vehicles
- **In «battery change» mode,** will maintain electrical supply to preserve vehicle memory settings
- **High power stabilised supply:** voltage & current adjustable

## 5 Modes

- Charge
- Diagnostic
- Showroom
- Change batterie
- Power Supply

## Advanced features

- Automatic restart
- Cable test and calibration
- Showroom mode lock
- "Easy charge" mode
- Activate and adjust an "expert" charging curve
- Automatic SOS recovery for sulphated battery



10,5 cm

## Intuitive interface

19 Languages available

## Slim size

The height of the charger (<11cm) enables to place it under vehicle

## Cables

- Fitted with 2x2.5m - 6mm<sup>2</sup> cables
- It can be fitted with 2x5m - 16mm<sup>2</sup> and more. The calibration is automatic.

## TECHNOLOGY

High duty cycle

**94%**

15% more energy




No external ventilation  
=  
No dust ingress



**Inverter - This technology enables :**

- A better duty cycle for a light wieght (3.8kg).
- Shock and vibration absorbing feet.

## FEATURES

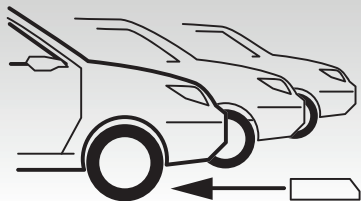

### Showroom Mode and reduced dimensions :

- Slim height (< 11 cm): to enable placement under vehicle.
- Showroom mode lock: to avoid mishandling ideal for garages and showrooms.
- Automatic restart: will automatically resume the mode from last position in case of power failure.

50 / 60 Hz		V	I max	25°C @100%	40°C @100%	Charge	START MINI	IP	L	mm <sup>2</sup>	SHOWROOM CONNECT	kg	cm	L x W x H cm / kg
220 > 240 V	540 W	2,5 m	6/12 V	30 A	30 A	10 > 400 Ah	2 V	21	2,5 m	6	ø M6	2,8	25,5 x 10,5 x 23	41,4 x 31,1 x 25 / 4,9
			24 V	15 A	15 A									