

GYSFLASH 50.24 is a high power stabilised supply incorporating Inverter technology with 5 functions :

- **Battery support:** sustains 6, 12 and 24V (liquid or gel) automotive battery during diagnostic work
- **Advance battery charger:** ensures an ideal charging cycle for battery maintenance for the most modern vehicle
- **Showroom mode:** maintains batteries in showroom vehicles
- **In «battery change» mode,** will maintain electrical supply to preserve vehicle memory settings
- **High power stabilised supply:** voltage & current adjustable

5 Modes

- Charge
- Diagnostic
- Showroom
- Change batterie
- Power Supply

Advanced features

- Automatic restart
- Cable test and calibration
- Showroom mode lock
- "Easy charge" mode
- Activate and adjust an "expert" charging curve
- Automatic SOS recovery for sulphated battery



10,5 cm

Intuitive interface

19 Languages available

Slim size

The height of the charger (<11cm) enables to place it under vehicle

Cables

- Fitted with 2x2.5m - 10mm² cables
- It can be fitted with 2x5m - 16mm² and more. The calibration is automatic.

TECHNOLOGY

High duty cycle
94%

15% more energy




No external ventilation
=
No dust ingress



Inverter - This technology enables :

- A better duty cycle for a light weight (6 kg).
- Shock and vibration absorbing feet.

FEATURES

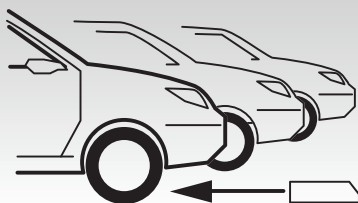

Showroom Mode and reduced dimensions :

- Slim height (< 11 cm): to enable placement under vehicle.
- Showroom mode lock: to avoid mishandling ideal for garages and showrooms.
- Automatic restart: will automatically resume the mode from last position in case of power failure.

50 / 60 Hz		V	I max	25°C @100%	40°C @100%	Charge	START MINI	IP	L	mm ²	SHOWROOM CONNECT	kg	cm	L x W x H cm / kg
220 > 240 V	1600 W	2,5 m	6/12 V	50 A	50 A	10 > 600 Ah	2 V	21	2,5 m	10	ø M6	4,4	30 x 10,5 x 29,2	41 x 39 x 22,5 / 6,5
			24 V		45 A				35 A					5 m