


OPTI 200.O - Ref. 060227
OPTI 200.G - Ref. 060463

OPTI 215.O - Ref. 060470
OPTI 140.O - Ref. 060487


Protective welding screens provide an effective barrier against welding rays, arcs and projections. They're also ideal to divide work areas or separate a workshop's various sectors.

- Complies with European standard ISO EN 25980:2015-01
- Filters both the visible and invisible light emitted by the welding arc.
- 100% PVC matter, extinguishable and highly resistant (0.4 mm thick).
- Stable frame.
- European made.

Orange colouring CE : intermediate transparency for optimum safety, while reducing the welder's lack of light and feeling of isolation.

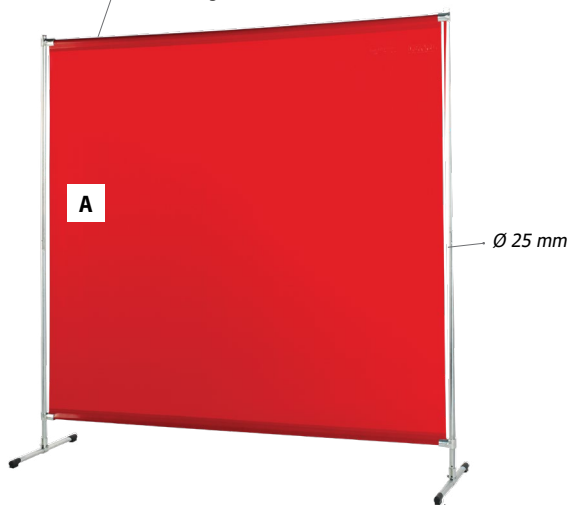


Green colouring T9 : opaque colour, slightly darker than orange, provides greater protection against the arc's light.

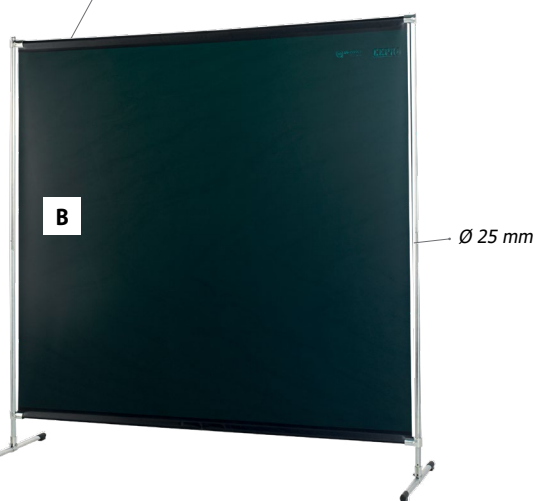

Fixed support but easily movable (8 kg).

Possible side opening
Ø 30 mm
Stable fixings with reinforced eyelets to prevent tearing.

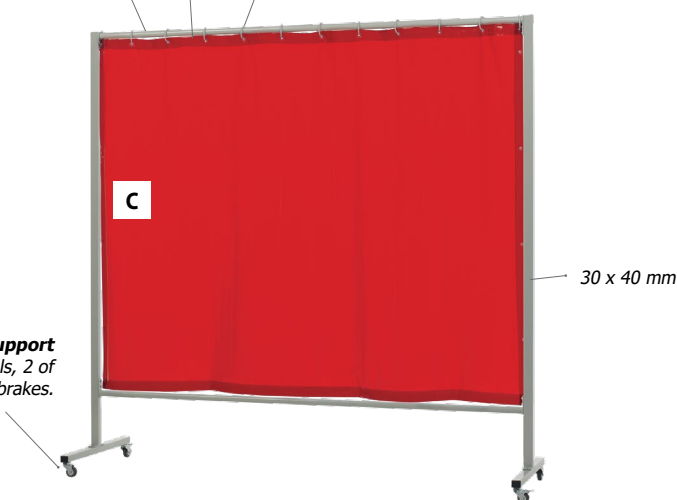

Mobile support
with 4 wheels, 2 of them with brakes.

Flexible curtain reinforced by seams over the entire perimeter.



				
		Curtain size without frame		kg
A	OPTI 200.O	Orange CE	200 x 200 cm	7.22
B	OPTI 200.G	Green T9	200 x 200 cm	7.08
C	OPTI 215.O	Orange CE	200 x 215 cm	16.11
D	OPTI 140.O	Orange CE	160 x 140 cm	1.38