


**BRAZ inductors, specially designed for brazing. Available in 2 models to suit different pipe and fitting diameters (from Ø08 to Ø16 and from Ø18 to Ø28). They are widely used in the plumbing and hydraulics industries. For clean, distortion-free brazing.**

For more information on the correct use of the inductor and the position of the inductor during heating, please refer to the product manual on [gys.fr](http://gys.fr).

Mandatory software version of the generator: V6.52

## INDUCTOR IN ACTION

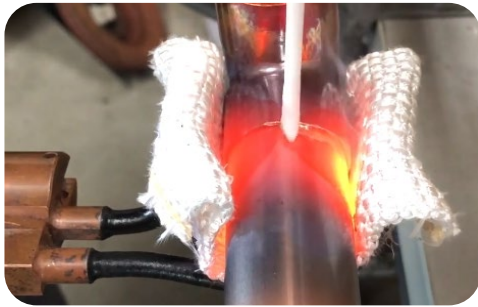

Brazing with rod on Ø28 fitting



Assembly of copper parts with rings



↳ 90°



↳ 180°

L90 BRAZ 16  
132 x 54 x 54 mm

L180 BRAZ 16  
138 x 43 x 49 mm

L90 BRAZ 28  
147 x 54 x 53 mm

L180 BRAZ 28  
140 x 58 x 49 mm

## RECOMMENDED USES

### Optimum use

Domestic plumbing  
Hydraulics  
HVAC (heating, ventilation and air conditioning)

### Possible use

Medical  
Blacksmithing

### Use Not Recommended

## PRODUCT COMPATIBILITY

### Powerduction :

110LG 058590

110LG 065246

110LG 083400

160LG 057814


160LG 065253

160LG 083417


220LG 066861


220LG 074576

With 32L adaptor already supplied (064515)



### Accessories :

Protection kit for BRAZ inductors  077515

Filler metals 



### Max opening

L90 BRAZ 16 → 20 mm  
132 x 54 x 54 mm

L90 BRAZ 28 → 32 mm  
147 x 54 x 53 mm



### Max width

L180 BRAZ 16 → 46 mm  
138 x 43 x 49 mm

L180 BRAZ 28 → 46 mm  
140 x 58 x 49 mm