


The WF 20 separate wire feeder, compatible with MULTIWELD 400 power sources, features a 4-roller wire feed system driven by a 50 W motor for smooth and precise wire delivery on all types of material. The dual digital display interface simplifies parameter adjustment.

PERFORMANCE

- **MIG/MAG :**
 - steel and stainless steel wire: Ø 0.6 to 1.6 mm
 - aluminium wire: Ø 0.8 to 1.6 mm
 - gasless cored wire: Ø 0.9 to 1.6 mm
- 4-roller motorised wire feeder for high-performance delivery on all types of wire.

SIMPLE INTERFACE

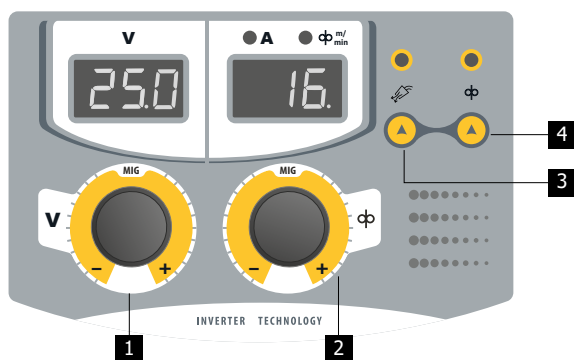

- 1 Voltage adjustment
- 2 Wire speed adjustment
- 3 Tests the flow of the shielding gas, and purges the gas hose
- 4 Activates wire feed without using gas

ERGONOMIC

- IP23 rated to withstand demanding environments.
- Viewing window to check consumption of filler wire.
- Integrated torch holder.



Supplied without accessories



Easy access to interconnection connectors with locking system.

ACCESSORIES (options)



MIG interconnection cables

Length	Wire Diameter	Part Number
5 m	70 mm ²	083998
10 m		084001
15 m	95 mm ²	084018
20 m		084025

Wire Type	Wire Diameter	Part Number
Type B rollers Steel / Stainless steel	Ø 0.6 / 0.8	042353
	Ø 0.8 / 1.0	042360
	Ø 1.0 / 1.2	046849
	Ø 1.2 / 1.6	042384
Aluminium	Ø 0.8 / 1.0	x2 042377
	Ø 1.0 / 1.2	040915
	Ø 1.2 / 1.6	042391
	Ø 0.9-1.0 / 1.2	042407
Cored wire	Ø 1.2 / 1.6	089280



Material	Length	Part Number
Steel	4 m	063792
Aluminium	3 m	063808

Input	Gas	Cored wire	Roller Ø	Roller Ø	Control	Speed	Rollers	EN 60974-5 (40°C)	Dimensions	Weight	IP
U1	Gas	Cored wire	200	300	Electronic control	m/min	Original rollers B	IA (60%)	cm	kg	IP
24 V DC	0.6 → 1.6	0.9 → 1.6	✓	✓	50 W	1.5 → 21	1.0 / 1.2	500 A	58 x 26 x 48	15	IP23